

LASER INTERFEROMETER GRAVITATIONAL WAVE OBSERVATORY  
- LIGO -  
CALIFORNIA INSTITUTE OF TECHNOLOGY  
MASSACHUSETTS INSTITUTE OF TECHNOLOGY

<b>Document Type</b> LIGO-G990130-01 - E Dec. 1999
<b>Fringe structure of LHO 2k FP a modeler's view</b>
Hiro Yamamoto

*Distribution of this draft:*

xyz

This is an internal working note  
of the LIGO Project..

**California Institute of Technology**  
**LIGO Project - MS 51-33**  
**Pasadena CA 91125**  
Phone (626) 395-2129  
Fax (626) 304-9834  
E-mail: info@ligo.caltech.edu

**Massachusetts Institute of Tech-**  
**nology**  
**LIGO Project - MS 20B-145**  
**Cambridge, MA 01239**  
Phone (617) 253-4824  
Fax (617) 253-7014

WWW: <http://www.ligo.caltech.edu/>

LIGO DRAFT

# Fringe structure of LHO 2k FP

a modeler's view


---

- Presented by Hiro Yamamoto of CIT/LIGO Lab at the lunch time meeting at LHO on December 9, 1999
- The analysis method was developed in 1997 when the 40m one arm FP measurement was done and analyzed by Matt Evans, Malik Rakhmanov and Hiro Yamamoto. This analysis was presented in the 3rd PAC Meeting at LHO in November 6-7, 1997 (LIGO Note L970507).
- The analytic form of the wiggling part was first derived by M.Rakhmanov during the course of the above research, and the derivation of the expression can be found in the thesis of M.Rakhmanov. The calculation was improved by M.Evans and H.Yamamoto.
- The fringe structure analysis tool for this 2k FP data has been developed using matlab, and will be installed at LHO.



# Fabry-Perot cavity field

## simple expression

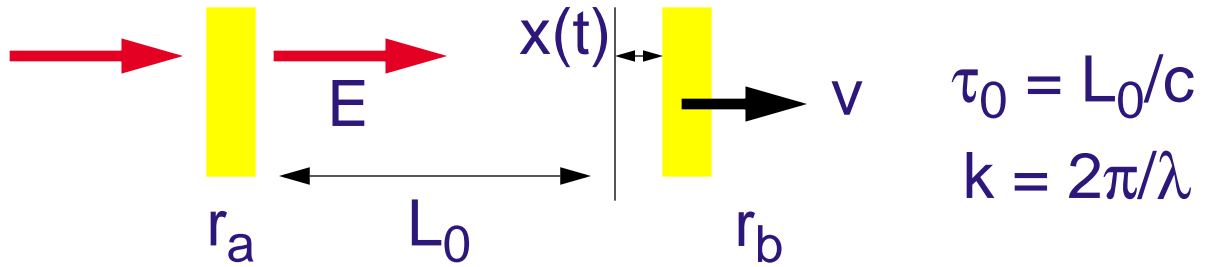


$$N = \frac{t}{2\tau_0}$$

- $$E(t) = \sum_{m=0}^{N} \exp(-(B + iC) \cdot m + i(A \cdot m^2))$$

$$A = 2k\tau_0 v \quad B = \ln\left(\frac{1}{r_a r_b}\right) \quad C = 2kx(t)$$

- $$E(t) \approx \frac{1}{1 - r_a r_b \exp(-2kx)} + \sqrt{\frac{i \cdot \pi}{A}} \exp\left(-\frac{\ln\left(\frac{1}{r_a r_b}\right)}{2\tau_0} (t - t_0)\right) \exp\left(i\left(\frac{B^2}{4A} - \frac{kv}{2\tau_0} (t - t_0)^2\right)\right)$$

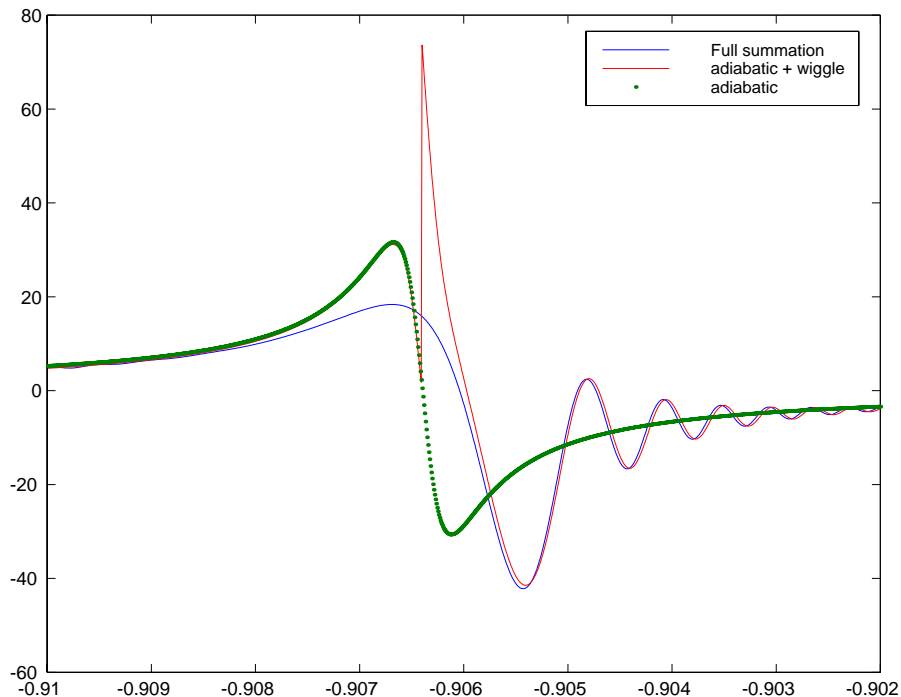


GO-G990130-00-E





# Data vs calculation

## preview of results


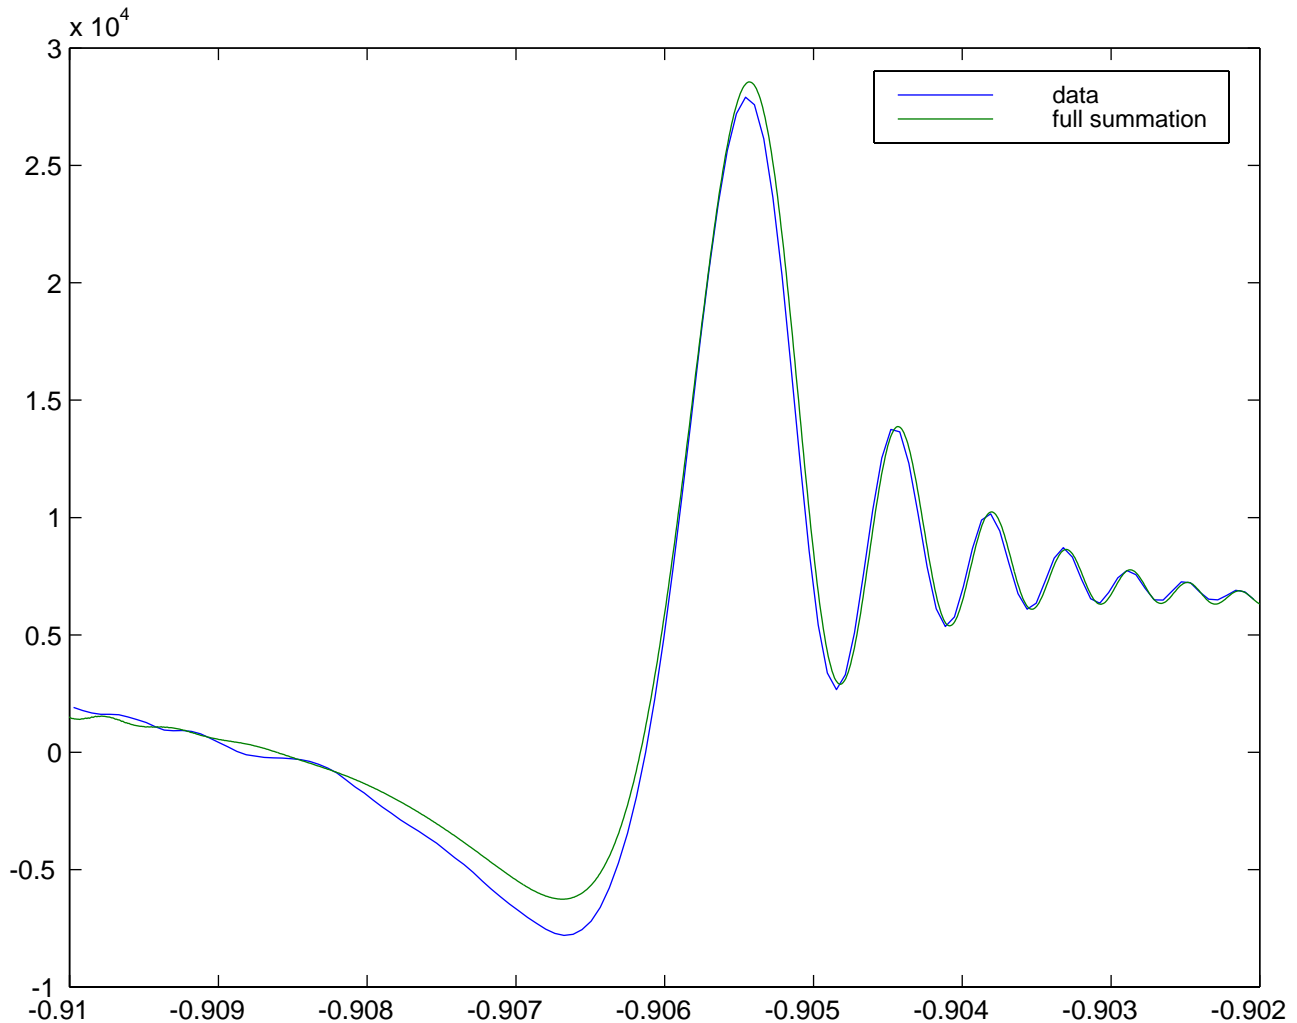


- Calculation is done using the parameters determined by the procedures described blow, except for the DC offset and mixing angle (assumed to be ideal).

# Velocity and resonant point

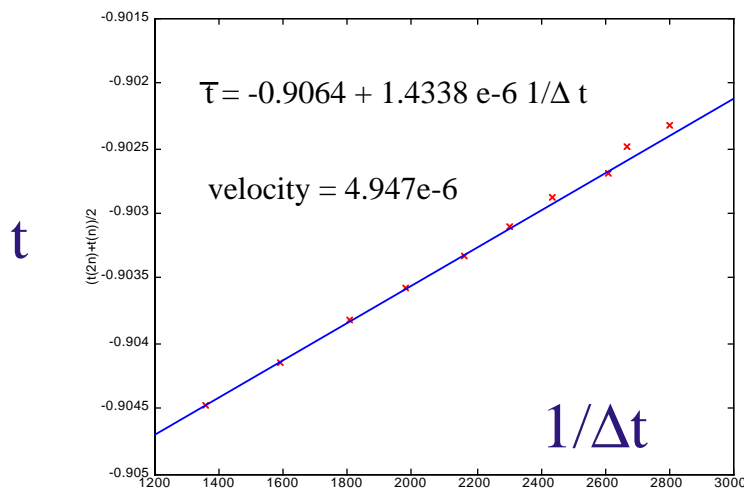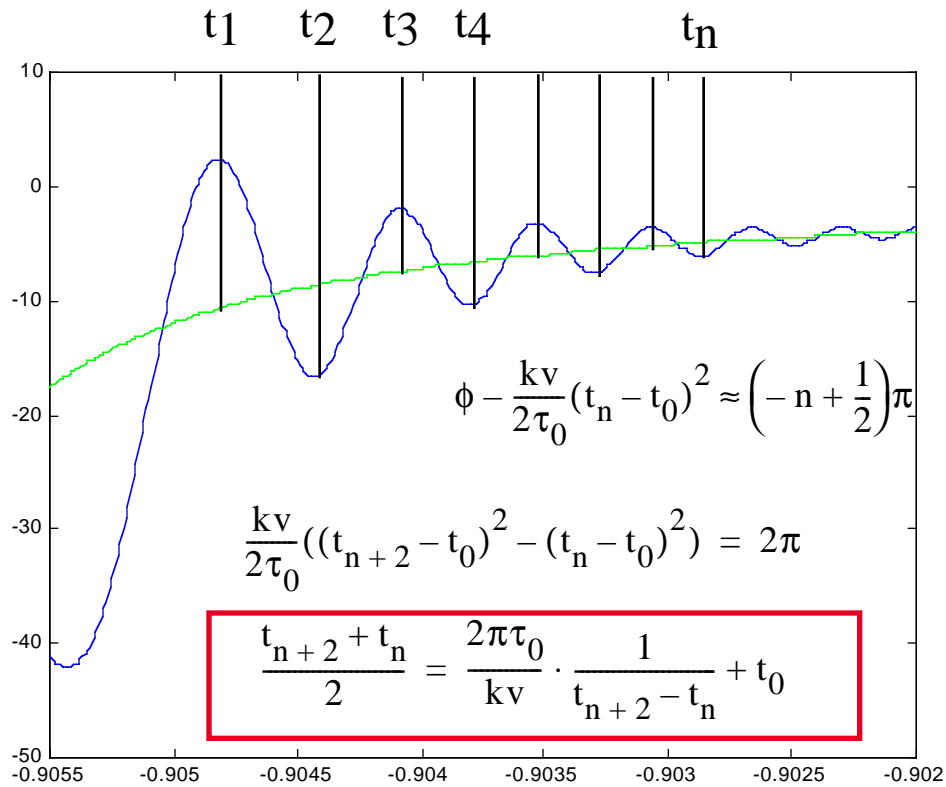

# Finesse

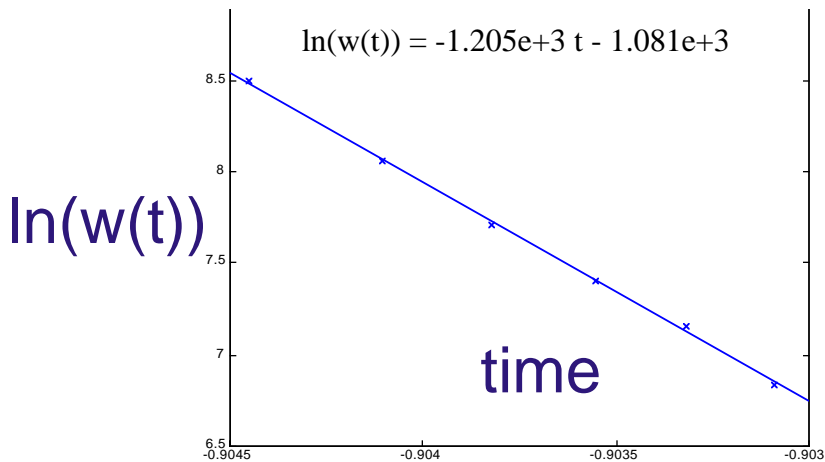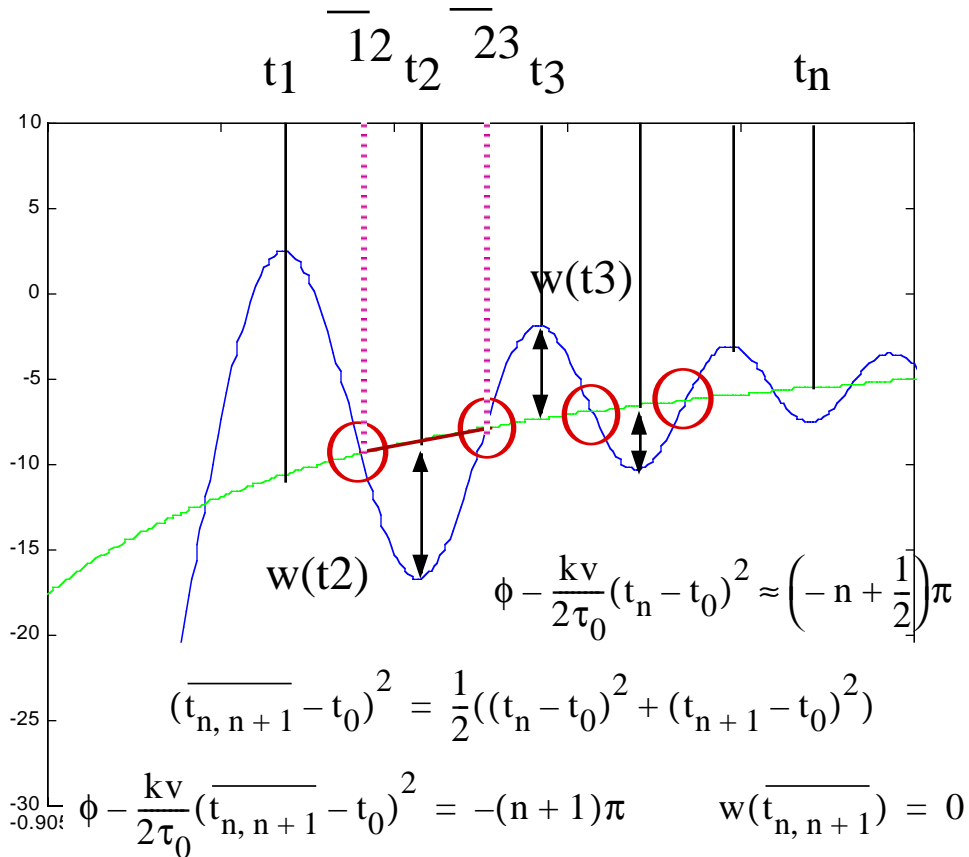


$$\text{slope} = \frac{\ln \frac{1}{r_a \cdot r_b}}{2 \cdot \tau_0}$$

$$R_a R_b = 0.9684$$


$$T_a J_0 J_1 P_{wr} = 575$$



# Summary of velocity and finesse preliminary

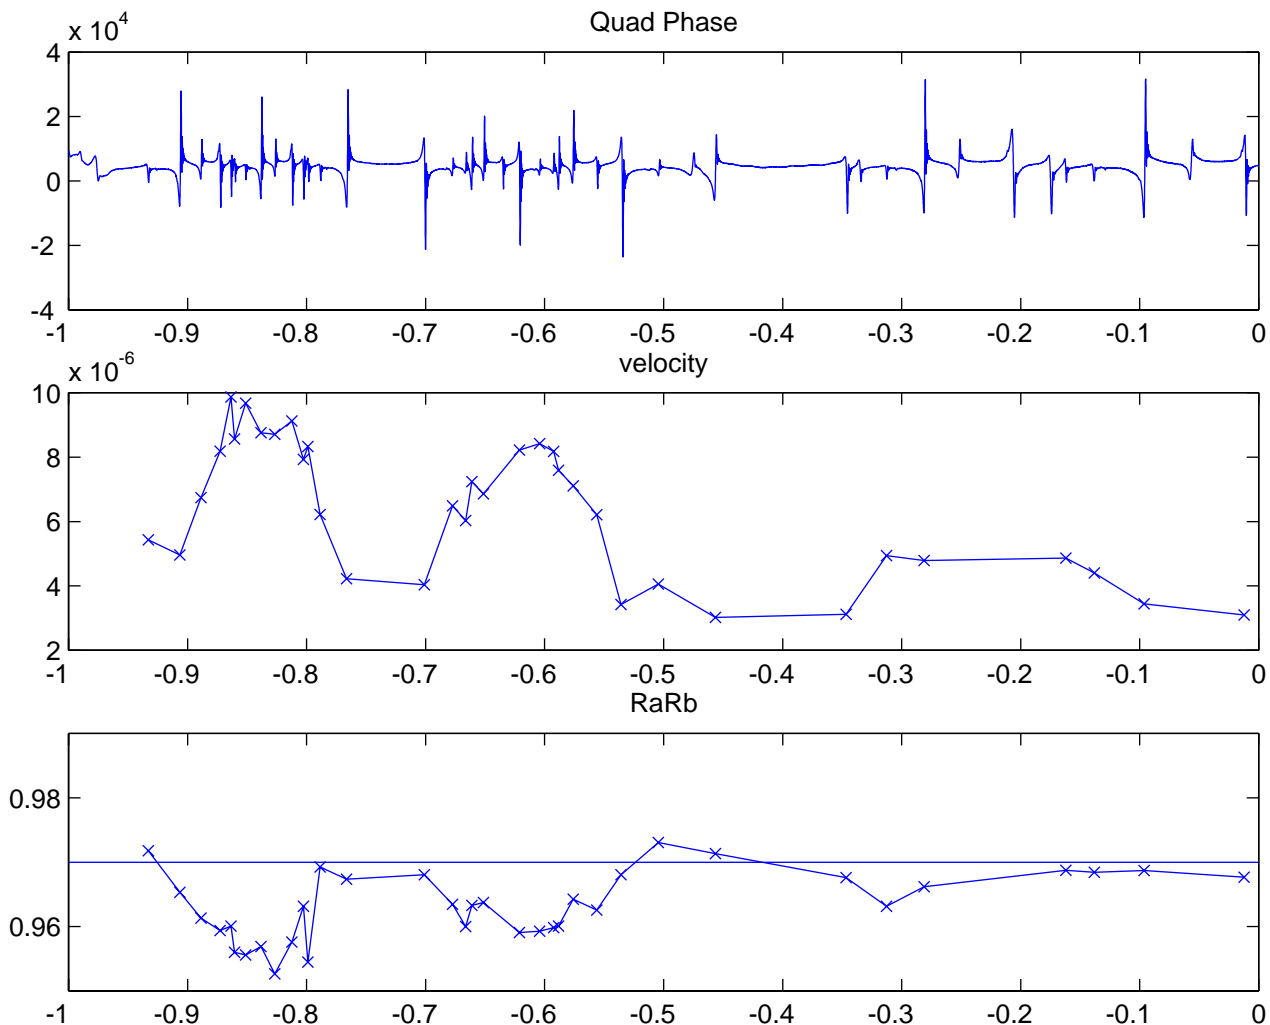

# Signal normalization

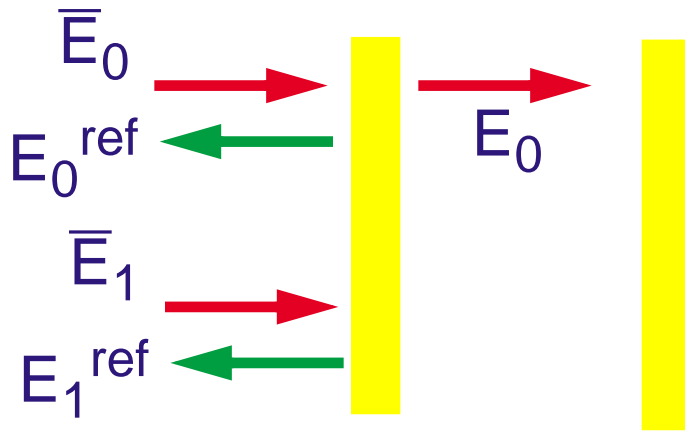

$$E_1^{\text{ref}} = r_a \bar{E}_1$$

$$E_0^{\text{ref}} = r_a \bar{E}_0 + t_a E_0$$

$$E_0 = \frac{1}{1 - r_a r_b e^{-i2kl}} + \text{wobble}$$

$$\text{demod} \sim \bar{E}_1 \cdot E_0$$

## • Error signal and slope - static limit

$$\text{error} = 2 \cdot \text{Pwr} \cdot J_0(\Gamma) \cdot J_1(\Gamma) \cdot T_a \cdot r_a \cdot \text{Imag} \left( \frac{1}{1 - r_a r_b \exp(-i2kl)} \right)$$

$$= 575 \cdot \text{Imag} \left( \frac{1}{1 - r_a r_b \exp(-i2kl)} \right)$$

$$\text{slope} = \frac{d}{dl} \text{error} = 575 \cdot \frac{4\pi r_a r_b \frac{1}{\lambda}}{(1 - r_a r_b)^2} = 575 \times 5.1 \text{e}10 = 2.7 \text{e}13$$