

DETC2005-84831

## PASSIVE, NON-LINEAR, MECHANICAL STRUCTURES FOR SEISMIC ATTENUATION

Riccardo DeSalvo, LIGO laboratory, California Institute of Technology, Pasadena, CA 91125, USA

Telephone: ++ 1 626 395 2968, fax: ++ 626 395 3814, e-mail desalvo@ligo.caltech.edu

Keywords: seismic attenuation, test mass suspensions, gravitational waves, geometric anti-springs

### ABSTRACT

Gravitational Wave detectors aim to detect strain perturbations of space-time of the order of  $10^{-21} \sim 10^{-22}$  at frequencies between one Hz and a few kHz. This space-time strain, integrated over a few Km long interferometers, will induce movements of suspended mirrors of the order of  $10^{-18} \sim 10^{-19}$  m. Seismic motion in this frequency band varies between  $10^{-6}$  and  $10^{-12}$  m. Required seismic attenuation factors, as large as  $10^{12}$ , by far exceed the performance of motion sensors, and are only obtained by means of a chain of passive attenuators. High quality springs in configurations yielding non-linear response are used to generate attenuation at low frequency. Similarly non-linear mechanisms are used in the horizontal direction. A description of some of these systems and some of the technical challenges that they involve are presented.

### NOMENCLATURE

Gravitational Wave (GW), Inverted Pendulum (IP), Geometrical Anti-Springs (GAS), Low Frequency (LF), Seismic Attenuation System (SAS), Laser Interferometric Gravitational wave Observatory (LIGO), Ultra High Vacuum (UHV), Electro-Magnetic (EM).

### INTRODUCTION

All GW detectors have a high level of passive attenuation to eliminate seismic perturbations from their test masses. In cryogenic bars the excitation generated by a passing GW of the bars internal resonances is monitored, typically in a frequency band close to one kHz [1,2,3,4,5,6]. In interferometric GW detectors [7,8,9] several test masses (mirrors) are suspended at a  $\sim$  km separation in a Michelson Interferometer configuration. These interferometers interrogate the position of the mirrors in the frequency range extending from 10 Hz (in the near future, possibly, from 1 Hz) to 10 kHz. To detect gravitational waves at lower frequencies it will be necessary to make measurements in space [10]. All terrestrial GW detectors have multiple, sequential seismic attenuation layers satisfying the requirement in their bandwidth of interest. The requirements become progressively more difficult as the bandwidth is extended towards lower frequencies.

The first point to understand is that, although interferometers measure strain in the horizontal direction, and therefore are nominally only sensitive to noise in the horizontal

direction, at every step of the attenuation chain small mechanical asymmetries inject seismic noise from one degree of freedom to the other (for example from the vertical to the horizontal, or tilt to translations), therefore it is important that each attenuation chain element in the chain delivers attenuation performance in all six degrees of freedom.

Mechanical attenuation in a given frequency band is obtained by means of mechanical oscillators with resonances at lower frequencies, and rely on the  $1/f^2$  natural transmission roll-off of mechanical oscillators. For example an ideal oscillator with resonant frequency of 0.3 Hz and movement in the horizontal direction will deliver 60 dB attenuation in that direction for all frequencies above 10 Hz. For the horizontal direction this oscillator could be as simple as a thin-wire,  $\sim$  2 m long pendulum (IP are routinely used in the initial attenuation stages, especially to reach lower resonant frequencies. IPs are mechanical systems with non-linear response and will be discussed later in this paper). It is reasonably easy to engineer oscillators at sufficiently low frequency in the three angular modes of a pendulum's bob by playing with the relative positioning of the bob's support point and its center of mass.

It is more difficult to generate clean, low noise and compact mechanical oscillators with low resonant frequency in the vertical direction. Helical springs tend to rotate while extending or contracting and are excessively long if low frequency isolation is required. To avoid this problem almost every GW experiment uses cantilever blade springs of some kind, and, when helical springs are used, counter-wound springs cancel the extensional-torsional coupling.

Compact springs (even cantilever blades) tend to be stiff and oscillate at too high frequencies. Several techniques have been developed to soften them up and suitably reduce their resonant frequency. The precursors of this technique were the magnetic anti-springs in the Virgo superattenuator chains [11]. The use of anti-springs in parallel to the cantilever blades to reduce the spring's vertical resonant frequency around their working point, naturally introduced non-linearity in the spring's behavior. While anti-spring equipped springs behave like normal (lower frequency) harmonic springs for small oscillations, their oscillations progressively deviate from purely sinusoidal for larger excursions and their resonant frequency

changes if significant changes of load or temperature shift the spring equilibrium point.

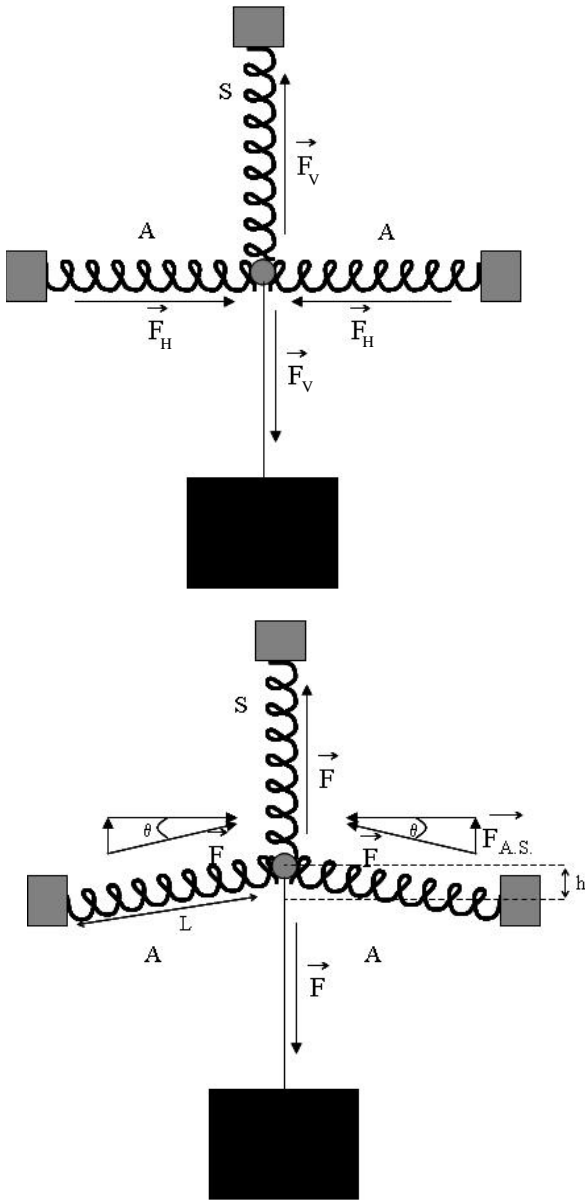


Figure 1: Sketch of the GAS mechanism. At the working point (top sketch) the vertical spring S supports the weight of the payload. The two opposite springs A are compressed, and their forces cancel. Moving out of the working point (bottom sketch) the opposing forces of the A springs do not cancel completely, generating a vertical component proportional to the displacement from the working point, the Anti-Spring force. The opposing springs may be mechanical or magnetic.

### THE ANTI-SPRING CONCEPT

The Virgo magnetic anti-springs proved very effective, but cumbersome to implement and operate [12], mainly because of the intrinsic unstable equilibrium of magnetic systems (which required angular stabilization mechanisms in the filter) and because of the comparatively large thermal variation of the strength of the magnets. Large volumes of sintered magnetic materials also raise problems of UHV compatibility and possible couplings to external magnetic fields.

### THE GEOMETRIC ANTI SPRING CONCEPT

Great simplification came with the introduction of mechanical anti-springs to reduce the elastic constant of a set of springs by playing on their geometrical arrangement. The technique was independently developed for seismic attenuation independently by my SAS group at LIGO and by MinusK Technology Inc. [13]. David Blair's group at University of Western Australia studied similar, and several other non-linear oscillator configurations [14]. Minus K uses separate helical springs to offload the vertical weight and to generate the anti-spring effect, in a configuration similar to that in the sketch of figure 1. In the Minus K approach spring-loaded flexures replace the springs labeled "A" [15]. In our LIGO SAS group we took advantage of a clever geometrical arrangement to use the same cantilever springs both to support the load and the antispring function. The blades are built flat and bend under load. We then take advantage of this "under load" bending, which generates radial compliance, to apply the radial compression that generates the antispring effect. We call the arrangement the Geometric Anti-Spring. The working principle of GAS is illustrated in figure 2 [16].

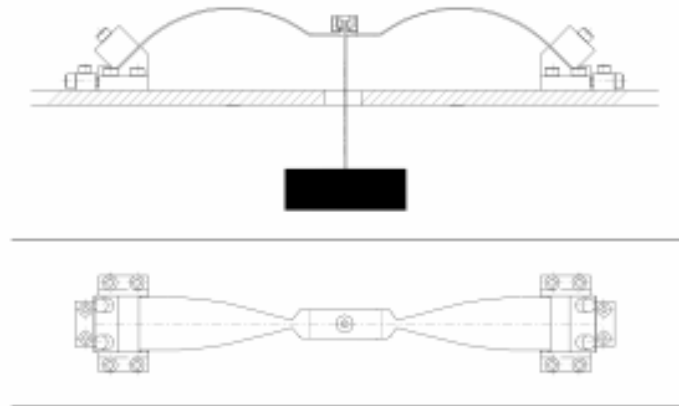


Figure 2. Sketch of the SAS GAS mechanism, side and top view. Two (or more) flat blades (bent under load) are mounted face to face. The radial compression of the blades is obtained by micromechanical movements of the blade clamps towards the center, thus tuning the Anti-Spring strength. The blades are cut with a characteristic profile (illustrated in the top view) so that they bend in a perfectly circular arc (side view) and the material is subject to uniform stress.

The MinusK technique is more versatile for supporting variable weights (the vertical support spring can be compressed to variable degrees), which is important for commercialization. The LIGO SAS technique has fewer internal resonances, and is more easily amenable to UHV compatibility [17,18]. The greater mechanical simplicity of the SAS springs comes at the cost of a fixed payload weight, requiring addition of ballast weight on the payload, or precision dimensioning of the springs to meet each individual load. A typical GAS spring behavior is shown in figure 3. The equilibrium point progressively (but not linearly) moves to lower values as the load is increased. At fixed radial compression the vertical resonant frequency changes as a function of the equilibrium position (varying payload weight) following, with very good approximation, a quadratic function. The scale of the abscissa and the total amount of payload vary for different blade dimensioning. The distance from zero frequency of the hyperbole's minimum is controlled by the radial compression of the blades. With

optimal payload weight the GAS filter works at its minimum resonant frequency. Increasing values of radial compression causes the GAS to work on different hyperboles with progressively lower minima, until the hyperbole minimum reaches zero frequency. For higher compression levels the spring becomes bi-stable and the quadratic function curvature changes sign. Changes of radial compression do not significantly change the value of the optimal payload.

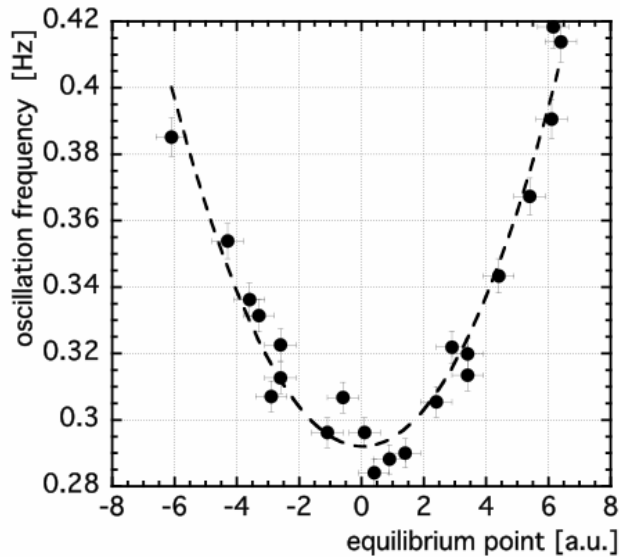


Figure 3. A typical frequency versus load curve at fixed radial compression is shown. The a.u. are used because they scale with the blade's size. The a.u. correspond to mm for ~200 mm long blades.

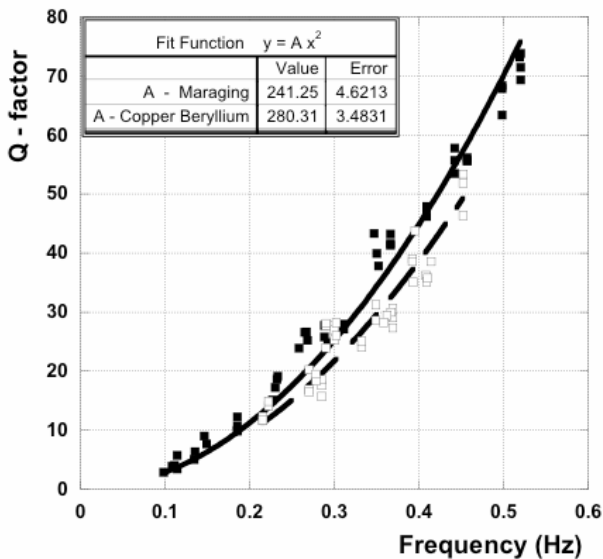


Figure 4. Quality factor measurements for similar blades made of Copper Beryllium (full squares and solid line fit) and Maraging 250 (empty squares and dashed line fit) [19].

### BEHAVIORAL PECULIARITIES

The symmetry of the design (shown in figure 2) makes the first order resonances ineffective in transmitting mechanical noise down the chain so they do not limit the GAS attenuation performance. The attenuation performance of GAS equipped filters is limited by mechanical vibration transmitted through

the inertia of the blades. The mechanical noise transfer function saturates at a level proportional to the blade (or leg in the case of an IP) to payload mass ratio times a coefficient of the order of 1 that takes into account the mass distribution in the blade or leg; This effect is discussed further in the section on IPs below. The saturation in the case of a well-designed and loaded GAS is typically 60 dB, as discussed in the performance chapter below.

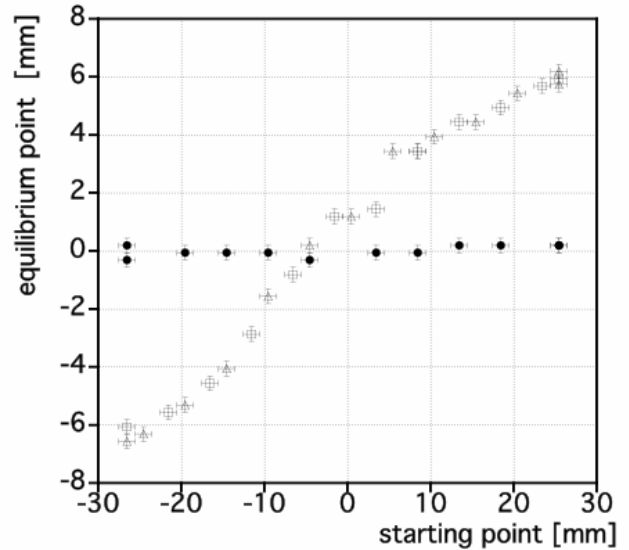


Figure 5. The wandering of a GAS spring equilibrium point caused by the magnified effects of hysteresis is shown; see text for description of the measurement procedure.

GAS springs can be seen as a spring (the vertical action of the blades acting as tip-loaded cantilever beams) coupled to a tuneable anti-spring (the adjustable radial compression of the arched blades). By tuning the anti-spring constant, the resulting elastic restoring force can be nulled. While the restoring force is nulled by the GAS mechanism, the full stress field remains in the blade structure, a large amount of elastic energy is stored in the blades and exchanged between the spring and the anti-spring modal movements during each oscillation. As a result of nulling the restoring forces, the visibility of many normally minute effects are strongly enhanced. Some of these interesting effects are useful, some a nuisance. Most striking is the effect on the resonance quality factor as the resonant frequency is driven towards zero [20]. The energy loss per cycle in the material remains roughly constant, while the kinetic energy decreases with the square of the resonant frequency, therefore a quadratic behavior is expected, and observed, as illustrated in figure 4. This is a beneficial effect. The resonant frequency of mechanical attenuators is always a problem and can cause unwanted and unacceptable low frequency oscillations of the payload. In many cases supplemental damping mechanisms are necessary -- often the most complex part of a passive mechanical attenuator. If a sufficiently low frequency is tuned, the resonant frequency is self damped and no external damping is necessary. This effect makes GAS equipped springs an ideal laboratory to study material Q-factors and hysteresis.

The most annoying effect comes from hysteresis, which is also magnified by the GAS mechanism. Elastic materials are never completely elastic, all have some level of memory of


their deformation history, typically parts per thousand of the last excursion, or less. When the restoring forces is almost nulled, hysteresis becomes comparable to the excursions that generated it. At high hysteresis level the spring presents a large band of apparently indifferent equilibrium points, which in its turn impedes the tuning of the GAS springs to lower frequency. As a result purely mechanically tuned GAS cannot be tuned below a level 100-300 mHz for normal materials. Typical low frequency tuning effects on hysteresis of a GAS equipped spring are illustrated in figure 5. The 300 mm long GAS spring is tuned to ~250 mHz. The black dots are obtained by allowing the GAS spring to oscillate freely and dissipate the hysteresis effects. The empty squares are obtained by starting from a black dot state, dragging the spring to the starting point of the horizontal axis, and slowly allowing the blade to return towards the equilibrium point with no oscillations. If the spring is then brought back to the same starting point and allowed to oscillate, it returns to the black equilibrium point. The large position hysteresis between the black and empty points rapidly diminishes as the spring is tuned to higher resonant frequency. The measurements shown in figure 5 are for a spring composed of large elastic limit, low-hysteresis Maraging steel. Still, as the resonant frequency is tuned towards zero the quality factor comes down more than two orders of magnitude (from thousands in a free oscillating blade to practically unity in a spring tuned below 100 mHz) while the hysteresis is magnified to several millimeter scale in a blade that is only 300 mm long.

If one attempts to tune the spring to much lower frequency, the hysteresis lag is so large that it does not allow sufficient oscillations to dissipate the hysteresis effects, and the “true” equilibrium position (black points) cannot be recovered. This hysteresis results in a practical limit on the lowest resonant frequency that can be obtained from a completely passive GAS-equipped filter.

Another effect that is magnified by the low frequency tuning is thermal sensitivity. One may think that since both the spring and the anti-spring constant originate from the same material elastic constant, the two effects change together and their balance does not change. This is true, and in fact thermal changes have little effect on the spring’s resonant frequency. But only the positive spring component is responsible for the lift force countering the payload weight, while the anti-spring effect just reduces the restoring force around the spring’s equilibrium point. As a result, while thermal variations of the material Young’s modulus, typically  $2 \cdot 10^{-5}/^{\circ}\text{C}$ , induce similarly small thermal movements of a linear spring equilibrium point. In the case of a GAS equipped spring the thermally induced change of the equilibrium point grows inversely proportionally to the square of the frequency reduction. Thermal drifts of millimeter per degree are possible on small springs. This is a serious nuisance if a precision suspension height is required. Fortunately the forces in play are comparatively small, equal to the Young’s modulus variation times the payload weight. Small corrective measures like a small supplemental bimetal spring or an electro-magnetic corrector can easily solve the problem.

It is particularly interesting to examine the case of the electromagnetic correction spring because it eliminates the thermal instabilities and tunes the spring to a lower limit than the practical limit discussed above, thus greatly lowering the starting frequency of the vibration isolation. An EM correction

spring [21,22] is composed of a precision LVDT position transducer [23] and a voice coil actuator [24] mounted coaxially with a GAS filter, and connected through a linear amplifier of variable gain. The GAS filter must already be tuned to its lowest practical frequency, e.g. 100 to 300 mHz. At this frequency tuning only ~1% of the original spring elastic constant is left to be neutralized. The LVDT-amplifier-voice-coil arrangement produces a force proportional to the displacement from the equilibrium position, indistinguishable from that of an ideal mechanical spring. An integrator circuit tuned to a time constant of more than 1000 second, mounted in parallel with the linear amplifier, provides the correction signal necessary to neutralize hysteresis and thermal drifts, thus stabilizing the equilibrium position to within a micron. Changing the gain amplitude and sign, the GAS spring can be easily tuned to much lower frequencies as long as the thermal and atmospheric disturbances are slower than the oscillation frequency, and the integration time is kept much longer than the desired oscillation period. Thanks to the initial softness of the GAS filter spring, only mW of power dissipation is required from the EM spring. Vertical oscillation frequencies as low as 30 mHz have been achieved in quiet air.

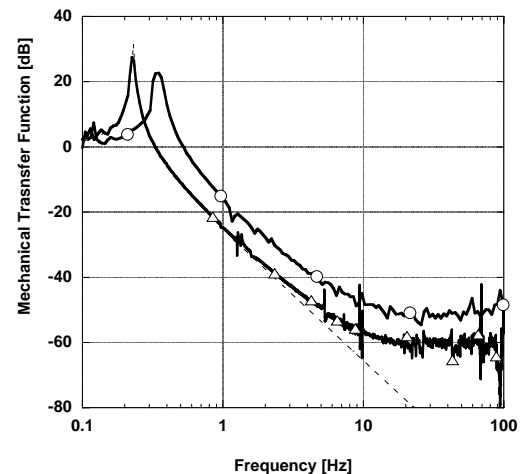

**Figure 6: mechanical Transfer Function of two different GAS blades. Note that the peak at higher frequency “shows” lower Q factor only because of measurement instrument settings, this is therefore not in contradiction with the behavior later illustrated.**

## MECHANICAL ATTENUATION PERFORMANCE

The most important measurement of an attenuation filter is its mechanical transfer function between the filter body and its payload. The two curves in figure 6 show typical GAS mechanical transfer functions. We note the resonant peaks at 0.2 to 0.4 Hz, followed by the  $1/f^2$  slopes characteristic of all well behaved harmonic oscillators and a saturation at 55 and 60 dB respectively.

The resonant peaks can be moved in frequency by changing the radial compression of the springs. To seismic improve isolation at low frequency one sets the resonant frequency as low as possible

As mentioned, the saturation level depends on the mass ratio between the blades and their payload. There is advantage in stressing the blades to the maximum allowed by the material elastic limit. The two curves in figure 6 correspond to blade sets differing only in thickness. The 60 dB saturation level is obtained with 2 mm thick blades loaded with 63 kg payload, while the 55 dB saturation correspond to a 25% less stressed 1.5 mm thick blades loaded with less than 40 kg.

By implementing an EM spring in parallel to the GAS mechanism, and by tuning its gain, it is possible to further reduce the filter vertical attenuation frequency by an order of magnitude (corresponding to two orders of magnitudes of spring elastic constant) despite the growing effects of hysteresis.

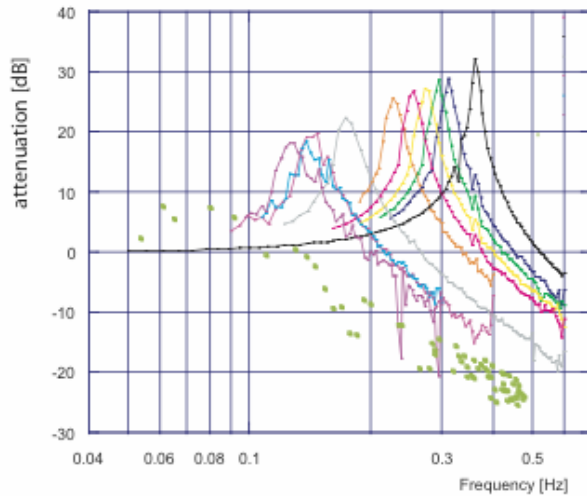


Figure 7. Mechanical Transfer functions of the same GAS filter with different EM gain levels.

As a result, not only the attenuation band is widened but, as illustrated in figure 7, the resonance quality factor progressively degrades until the blades becomes effectively critically damped (figure 8) and the resonance ill effects (enhanced motion of the payload at the resonant frequency) completely disappear (figure 7 and 8). Of course in this regime, where the restoring force is smaller than the hysteresis and thermal perturbation forces, the stability of the working point is provided only by the slow integrating correction circuit.

An unexplained effect happens when the GAS filter is pushed to very low frequencies, as in figure 8. The  $1/f^2$  attenuation slope progressively degrades towards a  $1/f$  slope.

The effect starts suddenly below a given frequency (120 mHz in figure 9), and the slope then linearly tends to  $1/f$  for frequency tending to zero. We have no explanation for this behavior.

## THE INVERTED PENDULUM

The GAS filter is a vertical motion device. Attenuation in the horizontal direction is generally obtained with simple, but extremely effective pendulums. Impractical wire lengths would be necessary to generate mechanical attenuation at very low frequency.

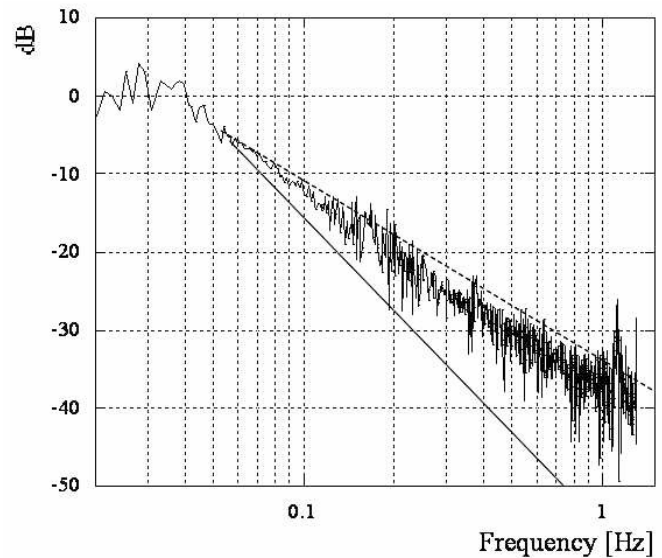


Figure 8: the transfer function slope is less steep than  $1/f^2$  for very low frequency tunes of the GAS filter.


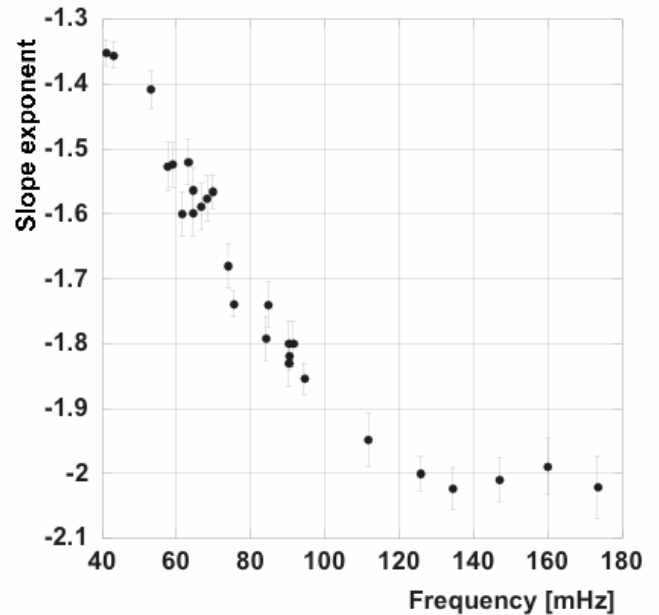


Figure 9: Attenuation slope behavior of a GAS filter for low frequency tuning.

A practical solution to produce LF mechanical attenuation in the horizontal plane is the Inverted Pendulum, also a non-linear mechanical mechanism [25,26]. Typically the IP are often used in conjunction with GAS filters in groups of three (sometimes four) to assemble “tables” (figure 10). The legs of the IP are composed by a rigid section between two flex joints. The flex joints of a leg can either be identical (as in the case of the Minus-K seismic isolators) or asymmetric, as in the sketch. In this latter case the top small flexure contributes practically no restoring force, while the stiffness of the larger bottom flexure is tuned to match the load requirements. An inverted pendulum with length  $l$ , loaded with a mass  $M$ , with ideal pivots (no restoring torque) in place of the flexures has a natural negative stiffness  $k = -Mg/l$ . The negative IP stiffness is neutralized by tuning the stiffness of the flexures. In principle

coarse tuning the flexure diameter and then fine-tuning the load can obtain arbitrarily low resonant frequencies. The end point of the tuning curve is a square root function (see Figure 11), plunging vertically to zero frequency, which requires precision weight tuning to reach very LF. Tuning well below 100 mHz are very easily achieved.

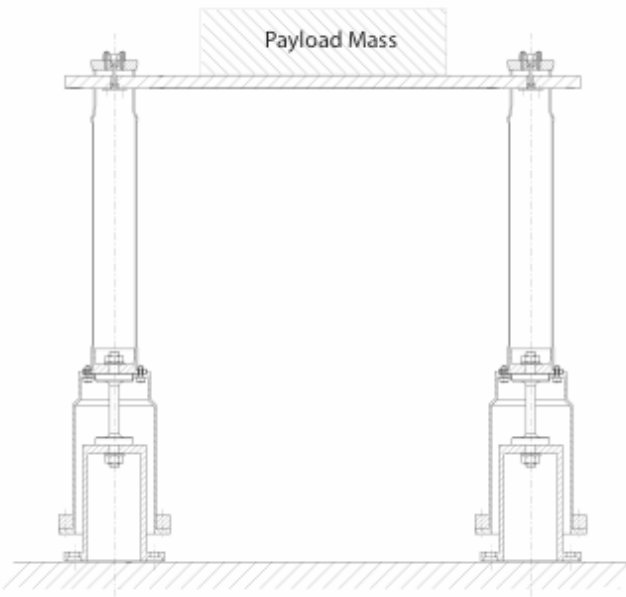


**Figure 10:** Cutout sketch of an IP table. A typical IP table has 3 or 4 legs. An IP leg is composed (following the assembly from the bottom up) of a stand, the main cylindrical flex joint providing the return torque, a counterweight bell to center the leg’s percussion point on the flex joint, the main leg tube, and the small flex joint connecting to the table structure.

End-stops must be provided to keep the IP from moving too far from its equilibrium point. The non-linear properties of the IP would make it collapse if too wide an excursion was allowed. Useful excursions of a few centimeters are common, thus providing, in conjunction with GAS filters, very effective protection even against Earthquakes.


Practical passive frequency IP tunings of 30-40 mHz are possible. Of course remotely controlled, precision LF tuning is also possible using EM springs. An IP table has three degrees of freedom: two translations and yaw. While the translations respond to the payload mass, the yaw resonant frequency is determined by the payload moment of inertia and thus depends on the separation between the legs and on the mass distribution. The yaw frequency is typically less important for seismic attenuation, but care must be taken because asymmetric mass distributions can mix the transverse with the yaw oscillation modes.

Another important variable to be considered in the design of an IP is the mass distribution in the IP leg. Like in the case of the GAS filter, the IP will present an attenuation saturation level proportional to the mass ratio between the legs and the payload. The IP legs, especially for tall IPs, can be quite heavy, thus the saturation level can be a serious limiting factor. Two strategies are used to bring the attenuation saturation level to acceptable levels (at least 60 dB). The obvious one is to minimize the leg’s mass, a very effective solution routinely

used by MinusK in their compact attenuation units. For larger structures a leg counterweight must be added below the flexure (figure 10) to bring the overall leg percussion point to coincide with the flexure effective bending point.

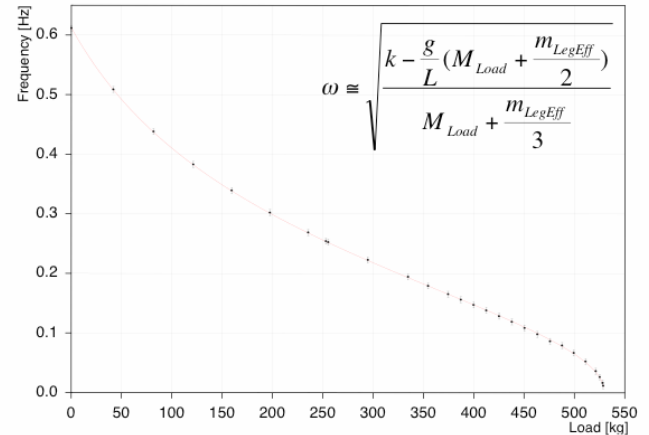

**Figure 11:** Typical frequency tuning for an IP table. In this case, to reach a resonant frequency of 30 mHz a load tuning of half a kg (~0.1%) was necessary. Resonant frequency of 13 mHz have been achieved in quiet air, lower may be achievable in vacuum.

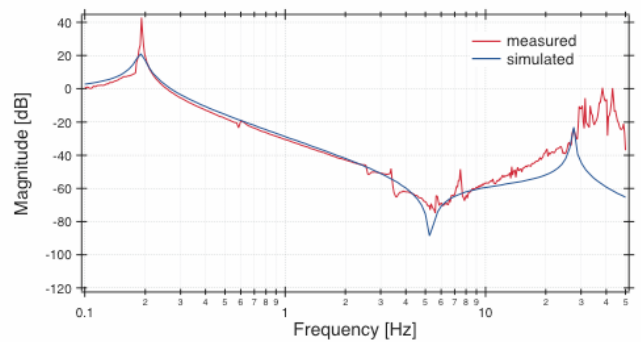

**Figure 12:** Typical IP Transfer Function (before frequency tuning). The smooth curve is a simulation, the other curve is measurement data. The structure above 20 Hz is due to the pile of ballast weights used in the test.

With correct percussion point tuning, considering a leg detached from its stand and from its table, any transversal excitation applied on the main flex joint will result in a rotation of the leg around the small flex joint. With an ideally tuned counterweight, once the leg is connected to the table no excitation can be transmitted through the small flex joint. Of course for the counterweight to be effective the leg structure must be rigid. The limitations of this technique are illustrated in figure 12. The peak at 0.2 Hz is the main IP resonant frequency, in large structures it normally is tuned at much lower frequency, 30 to 50 mHz. A 1/f2 slope connects the 0.2 Hz peak and the dip at 5 Hz. The dip is due to the mismatch of the counterweight mass and determines the saturation level of the attenuation. The separation between the two features is determined by the counterweight tuning. Better counterweight tuning drives the dip to higher frequency and generates a lower attenuation saturation level. An excess of counterweight would turn the dip into a peak and drive the saturation plateau back up. For practical reasons tuning the counterweight for attenuation in excess of 60-80 dB is difficult. The peak at 30

Hz is due to the elasticity of the rigid section of the leg. It generally is of little concern, but it can be driven to higher frequency by stiffening the leg structure and can be easily damped if bothersome.

## TYPICAL APPLICATIONS


Non linear, and negative stiffness springs are becoming commonplace in high performance SAS for GW detectors and, despite the entrenched competition from the older air bearing and active attenuation technologies, are progressively making an inroad in the industrial and scientific world wherever high performance, high reliability and low maintenance seismic attenuation is required. The negative stiffness springs and pendulums allow mechanical attenuation of vibrations on a wider bandwidth and dynamic range than any other existing technique. Their effectiveness extends beyond the sensitivity of any vibration sensor at the heart of active attenuation systems. Of course the passive systems are just seismic “isolators” and cannot compete with the active vibration suppression systems when the source of the vibration is internal to the system. In this case, despite all their limitations and complexity, there is no replacement for active vibration attenuation.

The largest and best performance working seismic attenuation systems are the Superattenuator chains (based on magnetic anti-springs) implemented in the Virgo Gravity Wave observatory [27]. The Superattenuators were already measured to be able to suspend test masses vibrating less than  $10^{-18}$  m above 4 Hz and, although not measured yet, less than  $10^{-20}$  m above 10 Hz. These vibration levels are close to the level of thermal (Brownian) noise of the materials used in the suspension mechanism.

Smaller, but more advanced systems are being implemented in the TAMA observatory[28] and in several GW test laboratories across the world. These systems rely on the simpler and better performance GAS technology for low frequency vertical attenuation and improved, wider bandwidth, inverted pendulums. The GAS mechanism (as well as the IP geometry) is used to suspend masses differing by more than three orders of magnitude. On the high end we have prototypes suspending hundreds of kg per blade (the largest designed to suspend the 4 or more tons of a LIGO large optical bench). At the lower end the spring of the last vertical stage suspension in the TAMA SAS lift 500 g per blade (figure 13 [29]), while the springs suspending test masses of an accelerometer developed at University of Pisa lift 100 g per blade [30].

Of course acoustic coupling would bypass and neutralize the attenuation effects of GAS filters and IP, and therefore most of the GW seismic attenuators work under vacuum. An interesting exception and mechanical curiosity is a conceptual design alternative to the LIGO external pre-isolation system [31]. It is a system with net negative stiffness in all degrees of freedom designed as a pre-isolator for low frequency suspensions of the LIGO optical benches. At the pre-isolator level, and below 100 Hz, acoustic perturbations are still not relevant and this initial attenuation stage can reside in air. The peculiarity of this system is that it is designed to neutralize the stiffness of the vacuum bellows dividing the support points of the in-vacuum optical benches from the vacuum tanks themselves. If implemented these negative-stiffness springs

would float the tons of the LIGO optical benches at LF, tens of mHz, and deliver broadband passive seismic attenuation (starting effective attenuation well below 1 Hz) through the walls of a large UHV system and despite the bellows’ stiffness.

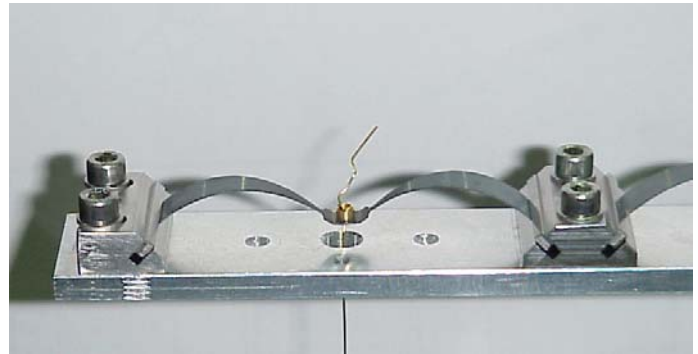

**Figure 13: One of the four GAS springs forming the last vertical attenuation stage for the TAMA mirror test masses. The beginning of a second spring is visible on the right.**

It should also be noted that GAS filters and IPs, or other LF flexures, are ideal supports for active isolation systems. Supporting a structure from very soft flexures not only has the effect of pre-filtering the external noise, thus reducing the active attenuation load, but also dramatically reduces the strength required from the actuators. To be effective, these actuators must be stronger than the suspension stiffness induced force, which in its turn changes with the square of the resonant frequency. Suspensions tuned at ten or thirty times lower frequency require 100 to 1000 times lower actuator strength. Low strength actuators can be built with much larger frequency dynamic range and less actuation noise than heavier ones, thus expanding the capabilities of the active attenuation. Also weaker actuators are less prone to excite resonances in the suspended structure and are therefore inherently safer.

In industry MinusK Technology has been one of the pioneers in non-linear springs for seismic attenuation. MinusK negative-stiffness-mechanism isolators, typically tuned just below 0.5 Hz, are widely used to isolate extremely vibration sensitive instruments and equipment. Some typical examples of use include scanning probe microscopes, micro-hardness testers, laser and optical imaging systems, dynamic test structures, and zero gravity simulation of spacecrafts[32]. Although not normally built for UHV, the MinusK units are vacuum compatible and are even used in cryogenic environments. Their payloads also range from less than a Kg to tons. MinusK has also developed a large-displacement mechanism (amplitudes of several inches) that is used in conjunction with an active stabilization system for vehicle applications.

## FUTURE TECHNOLOGICAL DEVELOPMENTS

GAS filters are ideal for low frequency vertical seismic attenuation and are already being implemented in TAMA as the last vertical attenuation step above the mirror. As illustrated by figure 4 and figure 5 structural damping and hysteresis are exposed by the GAS mechanism. It must be noted though that GAS springs have no more dissipation, and hence no more thermal noise, than normal blades made with the same materials, only the effects are made more evident by the cancellation of the spring’s restoring force through the GAS


mechanism. Structural dissipation is the source of thermal noise, the eventual limit of seismic attenuation. It is important to build the lowest filters in a GW SAS with materials having the lowest possible dissipation. To avoid couplings to external magnetic fields it is also important not to use ferromagnetic materials. From this point of view Maraging and other iron alloys are not the best engineering choice. We are taking advantage of the GAS properties to make comparative studies of the dissipation processes of different materials. At the moment we are comparing the performance of Maraging and Copper Beryllium, and we have in design GAS filters built with different kinds of non-magnetic glassy metals [33]. The idea is that the lack of crystalline structure will eliminate certain classes of dissipation mechanisms and possibly reduce thermal noise. Also the greater elasticity of glassy metals (roughly twice than crystalline metals) should allow the construction of higher performance filters, exceeding the 60 dB of figure 6. Lower dissipation and hysteresis, if achieved, would also clear the way for passive tuning of the GAS mechanism to lower frequencies.

These new materials, together with the recently developed EM spring technique, could be the road to provide lower frequency seismic attenuation in future Gravitational Wave Detectors.

Work is also ongoing to take advantage of the GAS properties to enhance the effects and more easily measure the effects of creep on materials at various temperatures and to precisely measure the thermal variations of the Young's modulus [34].

A new engineering design [35], combining the performance of IP and GAS filters (figure 14), is a telling example of the versatility and power of non-linear, passive mechanical systems. The design performance, at and above 1 Hz, of a single stage of passive attenuation [36] is equal to the cumulative performance of all three stages of the Advanced LIGO active seismic attenuation system [37,38,39]. The most important savings offered by this new alternative are construction costs (a single passive stage with active degrees of freedom and low bandwidth servo-controls limited to DC controls is much less expensive than actively controlling all degrees of freedom with high bandwidth, ~60 Hz, servo-control systems) and reduced complexity (one stage replacing three, and no active controls beyond DC alignment/positioning signals, unless additional seismic attenuation is desired), lower

maintenance requirements (no flowing fluids, virtually no dissipated power in vacuum) and natural UHV compatibility.

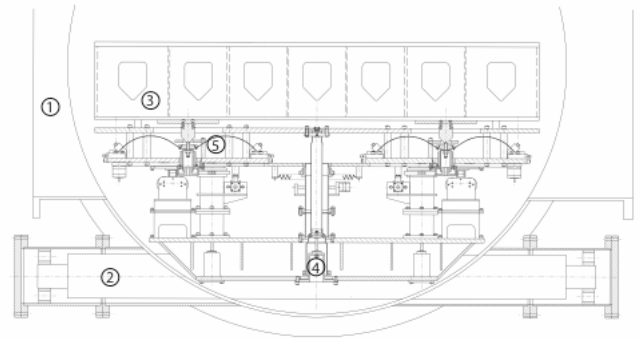

**Figure 14: Design of a proposed in vacuum, passive seismic attenuation system for the LIGO HAM optical tables. Visible inside the vacuum chamber (1), between the support beams (2) and the optical bench (3), are the IP legs (4) and, on the sides, two of the four GAS filters (5). All the other visible structures are safety structures and positioning and tidal correction mechanisms.**

## CONCLUSIONS

Non-linear vertical springs and other horizontal oscillation mechanisms have been developed to provide high-performance, high-reliability seismic attenuation. They are making progressive inroads both in science and industry.

## ACKNOWLEDGMENTS

I would like to thank my numerous students and postdocs. Over the years they made all the work and generated all the understandings at the base of the present good performance of these devices. While not diminishing the smaller but equally important contributions from the other collaborators, I would like to single out, in alphabetical order, A. Bertolini, G.C. Cella, M Mantovani, S. Marka, V. Sannibale, and H. Tarik.

The LIGO Observatories were constructed by the California Institute of Technology and Massachusetts Institute of Technology with funding from the National Science Foundation under Cooperative Agreement PHY 9210038. The LIGO Laboratory operates under Cooperative Agreement PHY-0107417. This paper has been assigned LIGO Document Number LIGO-P050001-00-D.

## REFERENCES

- <sup>1</sup> Z. K. Geng, et al., "Operation of the ALLEGRO detector at LSU", First Edoardo Amaldi Conference on Gravitational Wave Experiments, edited by E. Coccia, G. Pizzella, and F.Ronga (World Scientific Publishing Co., Singapore, 1995)
- <sup>2</sup> P.Astone, et al., "Long-term operation of the Rome "Explorer" cryogenic gravitational wave detector", Phys. Rev. D 47, 362-375 (1993).
- <sup>3</sup> P. Astone et al., "Increasing the Bandwidth of Resonant Gravitational Antennas: The Case of Explorer", Phys. Rev. Lett. 91, 11 (2003)

<sup>4</sup> P. Astone et al., "The gravitational wave detector NAUTILUS operating at T=0.1 K", Astroparticle Physics 7, 231 (1997)

<sup>5</sup> D.G. Blair, E.N. Ivanov, M.E. Tobar, P.J. Turner F. Van Kann and I.S. Heng, "High sensitivity gravitational wave antenna with parametric transducer readout," Phys. Rev. Lett., vol. 74, no. 11, pp. 1908-1911, 1995.

<sup>6</sup> M. Cerdonio et al., The Ultracryogenic Gravitational Wave Detector AURIGA, Class. Quantum Grav. 14 (1997) 1491

<sup>7</sup> B. Abbott et al. (LSC), "Detector Description and Performance for the First Coincidence Observations Between LIGO and GEO", Nucl. Instrum. Meth., A517 (2004) 154-179

- <sup>8</sup> M. Ando, et al., "Stable Operation of a 300-m Laser Interferometer with Sufficient Sensitivity to Detect Gravitational-Wave Events within Our Galaxy", *Phys. Rev. Lett.* 86 (2001) p.3950-3954
- <sup>9</sup> B. Caron, et al., "The Virgo interferometer", *Class. Quantum Grav.*, 14, 1997, pages 1461-1469
- <sup>10</sup> K. Danzmann and A. Rüdiger, "LISA Technology--Concept, Status, Prospects", *Class. Quant. Grav.* 20, S1 (2003).
- <sup>11</sup> M. Beccaria, et al., "Extending the Virgo Gravitational Wave detection band down to a few Hz, metal blade springs and magnetic antisprings", *Nucl. Instr. and Meth.*, A394, (1997) page: 397, 408
- <sup>12</sup> R. DeSalvo, et al., Performance of an ultra-low frequency vertical pre-isolator for the Virgo seismic attenuation chains", *Nucl. Instr. and Meth.*, A420, (1997/9) page: 316, 335.
- <sup>13</sup> Minus K Technology, 420 S. Hindry Ave., Unit E Inglewood, CA 90301, Tel: 310-348-9656, <http://www.minusk.com/>
- <sup>14</sup> John Winterflood, Zhou Zebing, David Blair, "Ultra low residual motion suspension system", Gravitational wave detection II, proceedings of the 2<sup>nd</sup> TAMA international workshop on GW detection, National Olympus Memorial Youth Center, Tokyo, Japan, October 19-22 1999, , page: 301-310, Universal Academy press, Tokyo.
- <sup>15</sup> Platus, D. L., "Negative-Stiffness-Mechanism Vibration Isolation Systems, SPIE, Vol. 3786, Optomechanical Engineering and Vibration Control (1999), pp. 98-105.
- <sup>16</sup> G. Cella, et al., "Monolithic Geometric Anti-Spring blades", *Nucl. Instr. and Meth.*, accepted for publication (October, 2004)
- <sup>17</sup> G. Cella, et al., "Seismic attenuation performance of the first prototype of a geometric anti-spring filter", *Nucl. Instr. and Meth.*, A487, (2002) page: 652, 660
- <sup>18</sup> V. Sannibale, et al., "The Monolithic Geometric Anti Spring Filters, design, construction and performances.", LIGO Document Number LIGO-P040041-00-D, in preparation.
- <sup>19</sup> Anamaria Effler, Caltech, work in progress.
- <sup>20</sup> Riccardo DeSalvo, et al., "Study of quality factor and hysteresis associated with the state-of-the-art passive seismic isolation system for Gravitational Wave Interferometric Detectors", *Nucl. Instr. and Meth.*, accepted for publication, (2005)
- <sup>21</sup> Maddalena Mantovani, Riccardo DeSalvo, "One Hertz Seismic Attenuation for Low Frequency Gravitational Waves Interferometers", submitted to *Nucl. Instr. and Meth.*, (2004)
- <sup>22</sup> M. Mantovani "Tesi di Laurea Specialistica 2004" LIGO-P040025-00-D, available at: <http://admbdbsrv.ligo.caltech.edu/publications/pubdefault.htm>
- <sup>23</sup> Hareem Tariq, et al., "The Linear Variable Differential Transformer (LVDT) position sensor for gravitational wave interferometer low-frequency controls", *Nucl. Instr. and Meth.*, A489, (2002) page: 570, 576
- <sup>24</sup> Chenyang Wang, et al., "Constant force actuator for gravitational wave detector's seismic attenuation systems (SAS)", *Nucl. Instr. and Meth.*, A489, (2002) page: 563, 569
- <sup>25</sup> G. Losurdo, et al., "An inverted pendulum preisolator stage for the Virgo suspension system", *Rev. of Sci. Instr.*, vol 70, N5, page 2507-2515, (1999)
- <sup>26</sup> Szabolcs Marka, et al., "Anatomy of the TAMA SAS seismic attenuation system", *Class. and Quantum Grav.*, 19, (2002), page 1605-1614
- <sup>27</sup> G. Ballardin, et al., "Measurement of the Virgo superattenuator performance for seismic noise suppression", *rev. of Sci. Instr.*, vol.72, N9, page 3643, 3652 (2001)
- <sup>28</sup> LIGO document number D010249 and 250 available at: <http://admbdbsrv.ligo.caltech.edu/dcc>
- <sup>29</sup> A. Takamori, et al., "Mirror suspension system for the TAMA SAS", *Class. Quantum Grav.* 19 (2002) 1615-1621
- <sup>30</sup> A. Bertolini, private communication.
- <sup>31</sup> Riccardo DeSalvo, "The Deep Fall Back Solution. Passive External Pre Isolation and Stack Damping for LIGO" LIGO document T040197-00-R, 2004, available at <http://admbdbsrv.ligo.caltech.edu/dcc/>
- <sup>32</sup> Bronowicki, A. J., et al, "Dual stage passive vibration isolation for optical interferometry missions," *SPIE*, Vol. 4852 (Mar 2003), *Astronomical Telescopes and Instrumentation 2002; High-Resolution Astronomy*.
- <sup>33</sup> Ana Maria Effler, Caltech, work in progress
- <sup>34</sup> Juri Agresti, Nicole Virdone, Marco Tarallo, Caltech, work in progress
- <sup>35</sup> LIGO document number D050100-through-149 available at: <http://admbdbsrv.ligo.caltech.edu/dcc>
- <sup>36</sup> HAM SAS report in preparation
- <sup>37</sup> R Abbott, et.al., "Seismic isolation for Advanced LIGO", *Class. Quantum Grav.* 19, 1591-1597, 2002
- <sup>38</sup> R Abbott, et. al., "Seismic isolation enhancements for initial and advanced LIGO", *Class. Quantum Grav*, 21, S915-S921, 2004
- <sup>39</sup> Robertson, N, et. al., "Seismic isolation and suspension systems for Advanced LIGO", "Gravitational Wave and Particle Astrophysics Detectors", *Proceedings of SPIE*, vol. 5500, ed. James Hough, Gary Sanders, pp 81-91, (2004)